

THIS DRAWING IS THE PROPERTY OF FLEX-RITE HOSE & COUPLINGS LTD AND MUST NOT BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE WRITTEN CONSENT OF FLEX-RITE

Destroy all previous copies of this drawing

ISS	DATE	REMARKS
4	11.12.96	REDRAWN
CKD		

FLEX-RITE HOSE & COUPLINGS LTD
WELLINGBOROUGH ENGLAND

DRAWN	T.B.	MATL
DATE	09.08.94	SPEC'N
SCALE	0.5	CKD BY

DIMS mm
DO NOT SCALE

GENERAL TOLERANCES
fractional ± 0.015 in
decimal ± 0.005 in
 ± 0.4 mm ± 0.1 mm

TITLE
G.A. OF FLEX-RITE IN LINE
SAMPLING DEVICE TYPE SD-IL-300/400
WITH SAFETY CABINET


DRAWING NO
SD315-00
ISS
4

6"	288.0	716.0
4"	259.0	659.0
3"	244.0	628.0
2½"	237.0	614.0
2"	226.0	593.0
1½"	218.0	577.0
1"	200.0	540.0
SIZE	'L' mm	OVERALL mm

WAFER BODY SECTION 60mm THICK
FOR ALL SIZES

P.C.D. TO SUIT DIN
OR ASA 150 lb FLANGES

STAINLESS STEEL CABINET. 150mm DEEP
NOTE:- CAN BE FIXED IN ANY POSITION
THROUGH 360° ROTATION

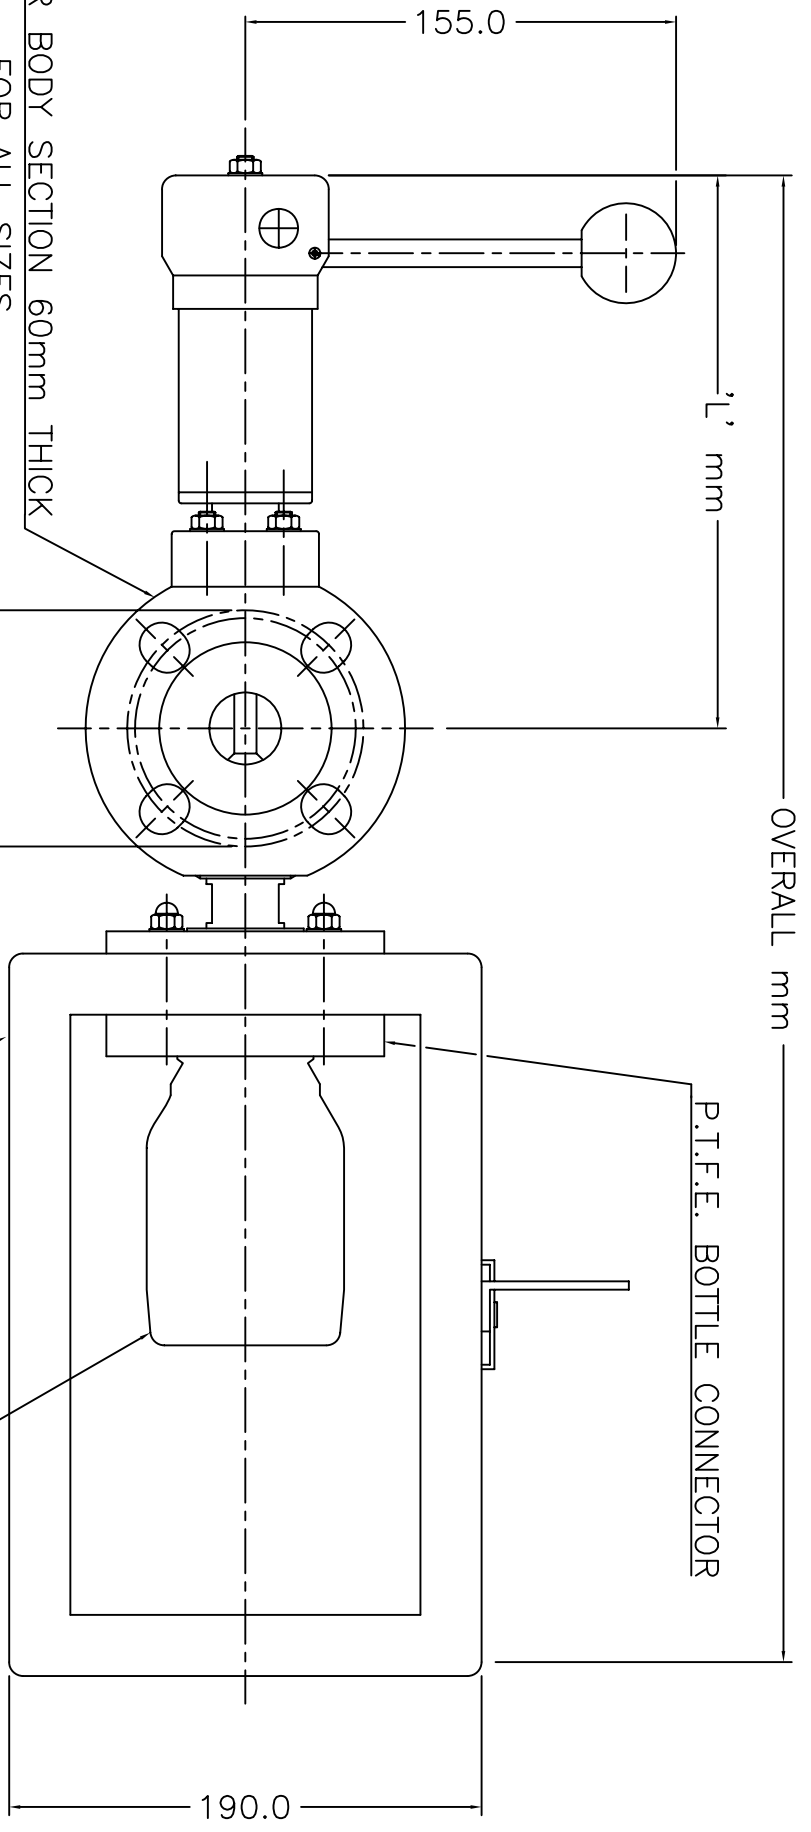

OVERALL mm

P.T.F.E. BOTTLE CONNECTOR

SAMPLE BOTTLE

OPERATING DATA	VALVE TYPE
PRESSURE	SD-IL-300 ST/STEEL
TEMPERATURE	SD-IL-400 P.F.A. LINED
	16 bar Max -20 to +200 °C
	10 bar Max -20 to +180 °C