

THIS DRAWING IS THE PROPERTY OF FLEX-RITE HOSE & COUPLINGS LTD AND MUST NOT BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE WRITTEN CONSENT OF FLEX-RITE

Destroy all previous copies of this drawing

ISS	DATE	REMARKS
4	11.12.96	REDRAWN
CKD		

FLEX-RITE HOSE & COUPLINGS LTD  
WELLINGBOROUGH ENGLAND

DRAWN	T.B.	MATL
DATE	09.08.94	SPEC'N
SCALE	0.5	CKD BY

DIMS mm DO NOT SCALE

GENERAL TOLERANCES  
fractional ±0.015 in  
decimal ±0.005 in  
±0.4 mm ±0.1 mm

TITLE  
G.A. OF FLEX-RITE IN LINE  
SAMPLING DEVICE TYPE SD-IL-300/400  
WITH SAFETY CABINET


DRAWING NO SD315-00  
ISS 4

6"	288.0	716.0
4"	259.0	659.0
3"	244.0	628.0
2½"	237.0	614.0
2"	226.0	593.0
1½"	218.0	577.0
1"	200.0	540.0
SIZE	'L' mm	OVERALL mm

WAFER BODY SECTION 60mm THICK  
FOR ALL SIZES

P.C.D. TO SUIT DIN  
OR ASA 150 lb FLANGES

STAINLESS STEEL CABINET. 150mm DEEP  
NOTE:- CAN BE FIXED IN ANY POSITION  
THROUGH 360° ROTATION

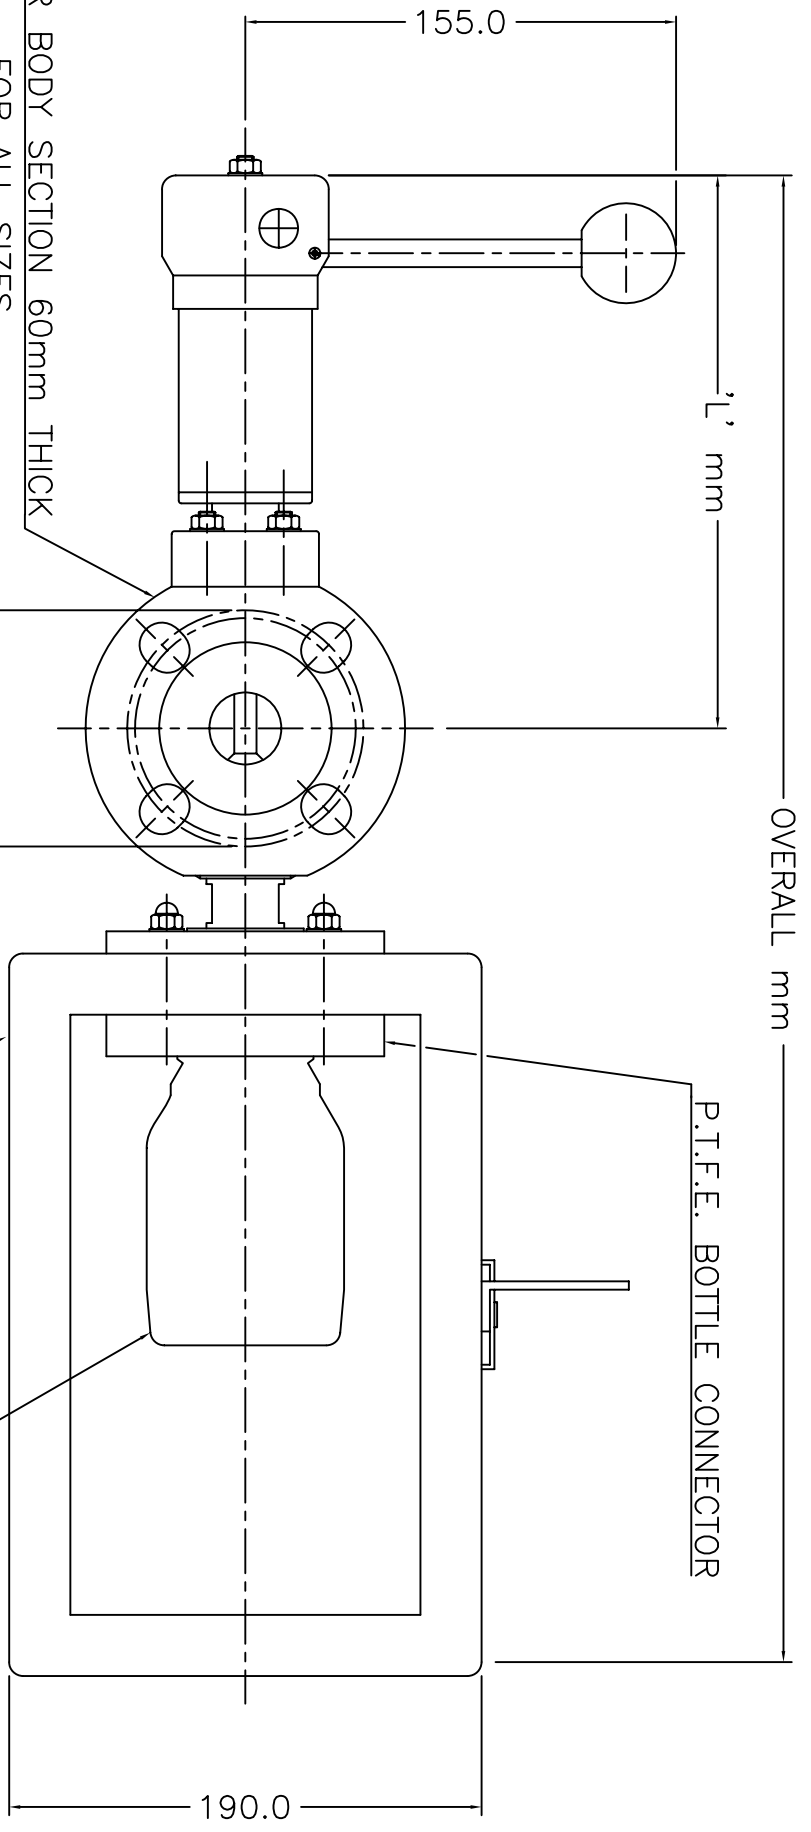

OPERATING DATA	VALVE TYPE
PRESSURE	SD-IL-300 ST/STEEL
TEMPERATURE	SD-IL-400 P.F.A. LINED
	16 bar Max -20 to +200 °C
	10 bar Max -20 to +180 °C